

Hyperscale clouds of tomorrow

Based on AMD EPYC™
3rd Gen 7003 Series
MILAN Processors

Authorised
Hyperscalers
Partner




Network | Storage | Compute | Converged | Hyperconverged



Solving Information
Technology's Complexity



Next Generation Network OCP 3.0 Mezzanine

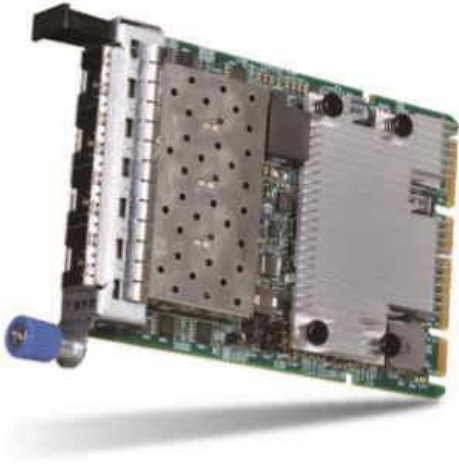


- ❑ Up to 200GbE with
- ❑ PCIe x16 bandwidth
- ❑ Hardware optimized for Pull-Tab, Ejector and Internal lock types of OCP Mezzanine
- ❑ PCIe 4.0 ready; backward compatible with PCIe 3.0
- ❑ OCP 3.0 to OCP 2.0 adapter for legacy utilizations

S5K | D43K-1U

Ultimate 1U Server with EPYC Performance Breakthrough

- ✓ Dual AMD EPYC processor with up to 4TB memory capacity
- ✓ Up to 5 expansion slots optimized for PCIe 4.0 and AI workloads
- ✓ Enhanced serviceability with tool-less, hot-swap design



2.5" SKU – 12 * U.2 NVMe

3.5" SKU

Processor

(2) AMD EPYC™ 7003 Series Processor, up to 225W TDP (240W cTDP)

Memory

Up to 4TB memory capacity with (32) DDR4 DIMM slots. Supporting 3200 Mhz 1DPC

Storage

(12) 2.5" U.2 SSD

(4) 3.5" SATA/SAS drives

Optional (4) 9mm NVMe/SATA/SAS drives

Network Control


(1) OCP 3.0 mezzanine
(2) 1 GbE dedicated management port

Expansion Slot

(1) PCIe 4.0 x8 SAS mezzanine slot
(1) PCIe 4.0 x8 OCP 3.0 mezzanine SFF slot
(2) PCIe 4.0 x16 FHHL or (3) PCIe 4.0 x16 HHHL

D43KQ-2U

Highly Scalable "EPYC" 2U Server Built for AI




- ✓ Scalable configurations built for AI
- ✓ Diversified IO options for diversified workloads
- ✓ Full featured design optimized for PCIe 4.0

SKU	LFF Tiered SKU	SFF Tiered Expander SKU	SFF SKU - All NVMe
Processor	(2) AMD EPYC™ 7003 Series Processor, Up to 225W TDP (240W cTDP1)		
Memory	Up to 4TB memory capacity with (32) DDR4 DIMM slots. Supporting up to 3200 Mhz 1DPC2.		
Drive Bay	Front (4) 3.5" SATA/SAS drives (8) 3.5"/2.5" SATA/SAS/NVMe drives Rear (Optional) (2) U.2 SSD	Front (16) 2.5" SATA/SAS + (8) 2.5" SATA/SAS/NVMe (SAS/SATA via SAS Mezz) Rear (Optional) (2) U.2 SSD	Front (16) 2.5" SATA/SAS PTP + (8) 2.5" SATA/SAS/NVME (SAS/SATA via SAS Mezz) Rear (Optional) (2) 2.5" SATA/NVMe SSD
Expansion Slot	(1) PCIe 4.0 x8 SAS mezzanine Option 1: (2) PCIe 4.0 x16 FHHL + (4) PCIe 4.0 x8 FHHL Option 2: (4) PCIe 4.0 x16 FHHL Optional: (1) PCIe 4.0 x8 HHHL, (1) PCIe 4.0 x16 HHHL or (2) 2.5" rear drive		
Network Controller	(1) PCIe 4.0 x8 OCP 3.0 mezz slot (1) Dedicated 1 GbE management port		
Power Supply	1+1 High efficiency redundant hot-plug Platinum/Titanium 1600W/2200W AC PSU, 1600W - 48V DC PSU		

S43KL-1U

Revolutionary Single Socket Compute Server



- ✓ Single socket compute server to challenge traditional dual socket systems
- ✓ Automate processes with AI on a budget
- ✓ Full featured design optimized for PCIe 4.0

	SFF 2.5" SKU	LFF 3.5" SKU
Processor	(1) AMD EPYC™ 7003 Series Processor, up to 225W TDP (240W cTDP)	
Memory	Up to 2TB memory capacity with (32) DDR4 DIMM slots. Supporting 3200 Mhz 1DPC	
Storage	(12) 2.5" hot-plug SATA/NVMe SSD	(4) 3.5" SATA/SAS drives Optional (4) 9mm NVMe/SATA/SAS drives
Network Control	(1) OCP 3.0 mezzanine (2) 1 GbE dedicated management port	
Expansion Slot	(1) PCIe 4.0 x8 SAS mezzanine slot Option 1: (2) PCIe 4.0 x16 HHHL & (1) PCIe 4.0 x8 HHHL Option 2: (2) PCIe 4.0 x16 FHH	

D42A-2U

All NVMe Server Perfect for CDN & Big Data Analytics



- ✓ AMD EPYC™ 7003 Series Processors
- ✓ up to 24 U.2 NVMe SSDs
- ✓ Up to 2 PCIe x16 slots for up to 2x 200GbE NICs
- ✓ All tool-less design with easy service motherboard tray

24 U.2 NVMe SKU

20 U.2 NVMe SKU

Processor	(1) AMD EPYC™ 7003 Series Processor, up to 225W TDP (240W cTDP)	
Memory	Up to 2TB memory capacity with (32) DDR4 DIMM slots. Supporting 3200 Mhz 1DPC	
Storage	(24) 2.5" hot-plug SATA/NVMe SSD	(20) 2.5" hot-plug SATA/NVMe SSD
Network Control	(1) OCP 3.0 mezzanine (2) 1 GbE dedicated management port	
Expansion Slot	(1) PCIe 3.0 x8 OCP 2.0 mezzanine Type A (1) PCIe 3.0 x16 HHHL or (2) PCIe 3.0 x8 HHHL	(1) PCIe 3.0 x8 OCP 2.0 mezzanine Type A (2) PCIe 3.0 x16 HHHL or (1) PCIe 3.0 x16 + (2) PCIe 3.0 x8

S43CA-2U

Density Optimized "EPYC" Multi-node Server



- ✓ AMD EPYC™ 7003 Series processors
- ✓ Single socket EPYC processor with 16 DIMMs per node optimized for compute-centric Data Center requirements
- ✓ Aggregated networking infrastructure services

SFF 2.5" SKU

LFF 3.5" SKU

Processor	(1) AMD EPYC™ 7003 Series Processor per node (4), up to 225W TDP (240W cTDP)	
Memory	(16) DDR4 DIMM slots per node, Supporting 3200 MHz 1DPC per node (4)	
Storage	(2) 2280/22110 NVMe M.2 per node	
Front IO	Option 1: (1) PCIe 4.0 x16 FHHL expansion slot per node (2) PCIe 4.0 x16 HHHL expansion slot per node (2) 2.5" hot-plug NVMe/SATA SSD per node Option 2: (5) 2.5" hot-plug NVMe/SATA SSD per node	
Expansion Slot	(1) PCIe 4.0 x8 SAS mezzanine slot Option 1: (2) PCIe 4.0 x16 HHHL & (1) PCIe 4.0 x8 HHHL Option 2: (2) PCIe 4.0 x16 FHH	
Rear IO	(1 or 2) single/dual 100G port pass-through module	




HYPERSCALERS.COM



“ Become the solution your customers need ”

Join our partner program TODAY

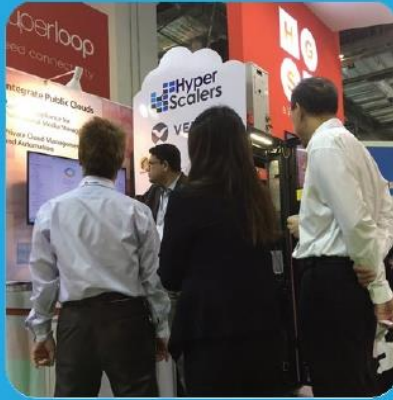

Authorised
Hyperscalers
Partner



About Hyperscalers

Hyperscalers is the world's first open Original Equipment Manufacturer offering proprietary-free alternative to traditional Tier 1 OEM vendors.

Hereto to solve Information technology's complexity, Hyperscalers developed the IP Appliance Design Process. Which is basically a process along with a utility, being the Appliance Optimizer Utility, which together, assists service providers 'productize' delivery of their Digital-IP.

Technology Partners



**Hyperscalers
Australia Head Quaters**

10 of 65 Tennant Street Fyshwick
ACT 2609 Australia
P +61 1300 113 112
E info@hyperscalers.com

Operating out of USA, India, EU
www.hyperscalers.com